

OMEX

OMEX

A name with extra vision



LED Panel Lights



MODEL	POWER (W)	LUMENS (LM)	COLOR TEMP.	A/B/C (MM)	PACKING (PCS/CARTO)
PPL6D/RD/OMX	6W	600LM	DL/WW	70/100/30	40
PPL9D/RD/OMX	9W	900LM	DL/WW	93/120/30	40
PPL12D/RD/OMX	12W	1200LM	DL/WW	118/147/30	40
PPL15D/RD/OMX	15W	1540LM	DL/WW	143/172/30	40
PPL20D/RD/OMX	20W	1890LM	DL/WW	185/220/30	20
PPL6D/SQ/OMX	6W	600LM	DL/WW	70/100/30	40
PPL9D/SQ/OMX	9W	900LM	DL/WW	70/100/30	40
PPL15D/SQ/OMX	15W	1540LM	DL/WW	135/170/30	40
PPL20D/SQ/OMX	20W	1890LM	DL/WW	185/215/30	40
PPL12D/SF/OMX	12W	1200LM	DL/WW	160 Dia	20
PPL18W/SF/OMX	18W	1800LM	DL/WW	205 Dia	40
PPL24D/SF/OMX	24W	2400LM	DL/WW	275 Dia	20
PPL32D/SF/OMX	32W	3200LM	DL/WW	275 Dia	20
PPL48D/SF/OMX	48W	4800LM	DL/WW	345 Dia	20
PPL12D/SF/SQ/OM	12W	1200LM	DL/WW	165*165 Dia	20
PPL18D/SF/SQ/OM	18W	1800LM	DL/WW	205*205 Dia	20
PPL24D/SF/SQ/OM	24W	2400LM	DL/WW	275*275 Dia	20
PPL32D/SF/SQ/OM	32W	3200LM	DL/WW	275*275 Dia	20

OMEX

A name with extra vision

LED Panel Light



MODEL	POWER (W)	LUMENS (LM)	COLOR TEMP	DIMENSION(MM)
PAN40D/OMX5	40W	4800LM	6500K	595*595*30
PAN40D/OMX3	40W	4800LM	6500K	595*595*30

OMEX

A name with extra vision

LED Downlight



MODEL	POWER (W)	LUMENS (LM)	COLOR TEMP.	A/B/C (MM)	PACKING (PCS/CARTO)
P-DL15D/COB/OMX	15W	1350LM	DL/WW	165/140	40
P-DL30D/COB/OMX	30W	3000LM	DL/WW	225/200	20
P-ADL7D/WH/OMX	7W	560LM	DL/WW	86/75	100
P-ADL7D/BK/OMX	7W	560ILM	DL/WW	86/75	100

OMEX

A name with extra vision



LED Batten Fittings



MODEL	DESCRIPTION	COLOR TEMP	PACKING (PCS/CARTON)
BO110/LED	1X10 watts LED batten fitting	Day Light	25
BO120/LED	1X20 watts LED batten fitting	Day Light	25
BO220/LED	2X20 watts LED batten fitting	Day Light	10
WBO110/LED	1X10 watts LED batten fitting wide body	Day Light	10
WBO120/LED	1X20 watts LED batten fitting wide body	Day Light	10

OMEX

A name with extra vision



LED Tube Rods



MODEL	POWER (W)	COLOR TEMP	BASE	PACKING (PCS/CARTON)
10WT8/LED	10 Watts	Day Light	T8	25
20WT8/LED	20 Watts	Day Light	T8	25
30WT8/LED	30 Watts	Day Light	T8	25

OMEX

A name with extra vision



LED Lamps




MODEL	POWER (W)	COLOR TEMP	BASE	PACKING (PCS/CARTON)
5W14O/DL/LED	5 Watts	Day Light	E14	100
5W14O/WW/LED	5 Watts	Warm white	E14	100
7WO/DL/LED	7 Watts	Day Light	E27	50
7W/WW/LED	7 Watts	Warmwhite	E27	50
9WO/DL/LED	9 Watts	Day Light	E27	50
9W/WW/LED	9 Watts	Warm white	E27	50
12WO/DL/LED	12 Watts	Day Light	E27	50
12W/WW/LED	12 Watts	Warm white	E27	50
30WO/DL/LED	30 Watts	Day Light	E27	50

OMEX

A name with extra vision

LED Flood Light

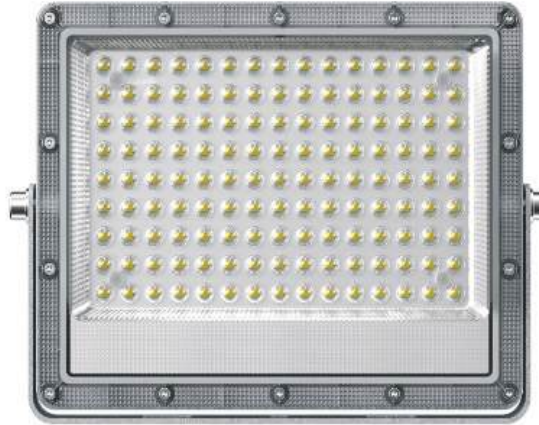

MODEL	POWER (W)	LUMENS (LM)	COLOR TEMP.	LAMP SIZE)	PACKING (PCS/CARTO
AC-801-050	50W	5000LM	Day Light	190*145*22mm	40
AC-801-050/WW	50W	5000LM	Warm Light	190*145*22mm	40
AC-801-100	100W	10000LM	Day Light	240*184*22mm	20
AC-801-100/WW	100W	10000LM	Warm Light	240*184*22mm	20
AC-801-150	150W	15000LM	Day Light	294*225*22mm	10
AC-801-150/WW	150W	15000LM	Warm Light	294*225*22mm	10
AC-801-200	200W	20000LM	Day Light	350*260*22mm	10
AC-801-200/WW	200W	20000LM	Warm Light	350*260*22mm	10
AC-801-400	400W	40000LM	Day Light	420*280*22mm	10
AC-801-400/WW	400W	40000LM	Warm Light	420*280*22mm	10

OMEX

A name with extra vision

LED Solar Flood Light



MODEL	POWER (W)	LUMENS (LM)	COLOR TEMP.	LAMP SIZE)	CHARGING TIME	WORKING TIME	PACKING (PCS/CARTO
SL-801-50	50W	500LM	Day Light	185*150*53	4-6 hours	12-14 hours	10
SL-801-100	100W	1000LM	Day Light	230*183*53mm	4-6 hours	12-14 hours	10
SL-801-200	200W	1500LM	Day Light	260*206*53mm	4-6 hours	12-14 hours	10
SL-801-300	300W	2000LM	Day Light	291*231*53mm	4-6 hours	12-14 hours	10
SL-801-400	300W	2500LM	Day Light	335*265*53mm	4-6 hours	12-14 hours	10

OMEX

A name with extra vision

LED Solar Street Light



MODEL	POWER (W)	LUMENS (LM)	COLOR TEMP.	LAMP SIZE)	CHARGING TIME	PACKING (PCS/CARTO
SL-606-200	200W	1000LM	Day Light	620*280*56mm	5-6 hours	5
SL-606-250	250W	1250LM	Day Light	680*280*56mm	5-6 hours	5
SL-606-300	300W	1500LM	Day Light	750*280*56mm	5-6 hours	5
SL-606-350	350W	1750LM	Day Light	820*280*56mm	5-6 hours	5
SL-606-400	400W	2000LM	Day Light	890*280*56mm	5-6 hours	5

LED Weather Proof Fitting



Tubes
IP Rating
Operating Temp.

LED T8
IP65
-10 to 50C°

MODEL	ITEM	LENGTH (L)	HEIGHT (H)	WIDTH (W)	MOUNTING DISTANCE (LF)	CLIPS	PCS./CTN.
WP110/LED	2' LED T8 Single	660	94	85	303	4	6
WP210/LED	2' LED T8 Double	660	94	135	303	4	8
WP120/LED	4' LED T8 Single	1268	94	85	900	8	6
WP220/LED	4' LED T8 Double	1268	94	135	900	8	8

Waterproof Switch & Socket



MODEL	DESCRIPTION	IP RATING	PACKING (PCS/CARTON)
WP301/OMX	1 gang 1 way switch	IP55	60
WP303/OMX	2 gang 1 way switch	IP55	60
WP305/OMX	3 gang 1 way switch	IP55	60
WP405/OMX	1 gang switch socket	IP55	60
WP406/OMX	2 gang 13A switch socket	IP55	30
WO317/OMX	Bell push	IP55	60

OMEX

A name with extra vision



Ceiling Fan




MODEL	DESCRIPTION	PACKING (PCS/CARTON)
FC56/OM/WH	56" Ceiling fan white color RPM 300 with 3x3 regulator	3
FC56/OM/IV	56" Ceiling fan ivory color RPM 300 with 3x3 regulator	3
FC56/OM/BR	56" Ceiling fan brown color RPM 300 with 3x3 regulator	3
FC48/OM/WH	48" Ceiling fan white color RPM 350 with 3x3 regulator	3
FC48/OM/IV	48" Ceiling fan ivory color RPM 350 with 3x3 regulator	3
FC48/OM/BR	48" Ceiling fan brown color RPM 350 with 3x3 regulator	3
FC36/OM/WH	36" Ceiling fan white color RPM 400 with 3x3 regulator	3
FC36/OM/IV	36" Ceiling fan ivory color RPM 400 with 3x3 regulator	3
FC36/OM/BR	36" Ceiling fan brown color RPM 400 with 3x3 regulator	3

OMEX

A name with extra vision



Wall Fan 16"

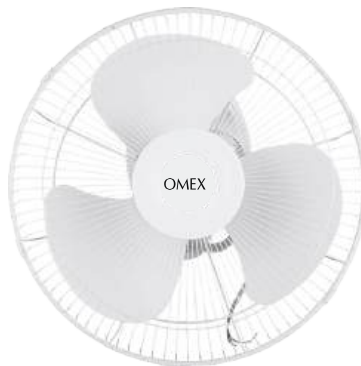

Orbital Fan 16"



Table Fan 16"

- Size: 16-Inch
- Voltage: 240-220V ~ 50Hz
- Power: 55W
- Blade Material: High-quality ABS plastic
- Colors Available: White, Black

Fan Family



Floor Fan 16"

OMEX

A name with extra vision

Ceiling Fan 60x60



MODEL	DESCRIPTION	PACKING (PCS/CARTON)
FCF16LED/4C/OMX	Decorative square ceiling fan LED light with remote controle white color	1
FCF16LED/OMX	Decorative square ceiling fan LED light RGB with remote controle golden color	1

OMEX

A name with extra vision

Exhaust Fan



MODEL	DESCRIPTION	PACKING (PCS/CARTON)
15OVR	6 inch round ventilating fan	20
20OVR	8 inch round ventilating fan	12
15OAVR	6 inch round ventilating fan with auto shutter	20
20OVAR	8 inch round ventilating fan with auto shutter	12
15OVS	6 inch square ventilating fan	6
20OVS	8 inch square ventilating fan	6
25OVS	10 inch square ventilating fan	6
30OVS	12 inch square ventilating fan	5

OMEX

A name with extra vision

Exhaust Fan



MODEL	SIZE	IMPELLER DIA(mm)	RATED SUPPLY	SPEED (RPM)	CURRENT (AMP)	POWER INPUT (m ³ /hr)	AIR DELIVERY (m ³ /hr)	NOISE LEVEL (dBA)
90IVS	09"	225	240V,50Hz	1400	0.35	50	970	50
120IVS	12"	300	240V,50Hz	1400	0.3	70	1600	50
150IVS	15"	380	240V,50Hz	1400	0.75	150	3000	50
180IVS	18"	450	240V,50Hz	1400	1.2	250	5500	60
240IVS	24"	600	240V,50Hz	900	2.5	550	9400	60



Extension Sockets



MODEL	DESCRIPTION	PACKING (PCS/CARTON)
512N3M	2 Way extension bar with 3 meters wire and neon	30
512N5M	2 Way extension bar with 5 meters wire and neon	20
513N3M	3 Way extension bar with 3 meters wire and neon	30
513N5M	3 Way extension bar with 5 meters wire and neon	20
514N3M	4 Way extension bar with 3 meters wire and neon	30
514N5M	4 Way extension bar with 5 meters wire and neon	20
515N3M	5 Way extension bar with 3 meters wire and neon	30
515N5M	5 Way extension bar with 5 meters wire and neon	20
IP543N3M	3 Way extension bar with 3 meters wire and neon	30
IP543N5M	3 Way extension bar with 5 meters wire and neon	20
IP544N3M	4 Way extension bar with 3 meters wire and neon	30
IP544N5M	4 Way extension bar with 5 meters wire and neon	20
IP545N3M	5 Way extension bar with 3 meters wire and neon	30
IP545N5M	5 Way extension bar with 5 meters wire and neon	20
IP543N2USB3M	3 Way extension bar with 3 meters wire and neon USB	30
IP543N2USB5M	3 Way extension bar with 5 meters wire and neon USB	20
IP544N2USB3M	4 Way extension bar with 3 meters wire and neon USB	30
IP544N2USB5M	4 Way extension bar with 5 meters wire and neon USB	20
IP543NUSBC3M	3 Way extension bar with 3 meters wire and neon USB+C	30
IP543NUSBC5M	3 Way extension bar with 5 meters wire and neon USB+C	20
IP544NUSBC3M	4 Way extension bar with 3 meters wire and neon USB+C	30
IP544NUSBC5M	4 Way extension bar with 5 meters wire and neon USB+C	20

Electric Door Bells



MODEL	DESCRIPTION	PACKING (PCS/CARTON)
4411	Door bell ding dong	50
4412	Door bell stereophonic ding dong	50
4413	Door bell alpha ding dong	50
4311	Door bell bird tone	80



OMX0.5HP



OMX1.0HP/CPM



OMX2.0HP/CPM

Water Pump



MODEL	SUCTION HEAD	DISCHARGE HEAD	FLOW RATE	INLET.OUTLET SIZE	PCS.M CARTON	G.W	IP RATING	DUTY TYPE
OMX0.5HP 0.37kw	8m	30-40	30-35/min	1" x 1"	6	5.5 kgs	54	S1
OMX1HP/CPM0.75kw	8m	25-30	95-100/min	1" x 1"	1	12.3 kgs	54	S1
OMX2HP/CPM1.55kw	8m	15-20	320-325/min	2" x 2"	1	21.3 kgs	54	S1

Pump Accessories



OPC-3



OPC-1



OFS-2M
PFS-3M

MODEL	DESCRIPTION	PACKING (PCS/CARTON)
OPC-1	Auto pressure water pump 220V/240V 50Hz IP65 horizontal	12
OPC-3	Auto pressure water pump with gauge 220V/240V 50Hz IP65 vertical	12
OFS-2M	Float switch with 2 meter wire	20
OFS-3M	Float switch with 3 meter wire	20

Sanitary Fittings



Code: SN-I000ES, Basin mixer with hose and fittings



Code: SN-3000ES, Shower mixer with hand shower and fittings



Code: SN-I043L, Basin mixer with hose and fittings



Code: SSN-3243L, Shower mixer with hand shower and fittings



Code: SN-7000ES, Kitchen mixer with hose and fittings



Code: SN-5000ES, Kitchen mixer with hose and fittings



Code: SN-I002AV, Angle valve



Code: SN-I001AV, Angle valve



Code: SN-5012QL, Kitchen mixer with hose and fittings



Code: SN-7012QL, Kitchen mixer with hose and fittings



Code: SN-S76L, ABS hand shower



Code: SN-3012QL, Shower mixer with hand shower and fittings



Code: SN-I012QL, Basin mixer with hose and fittings

OMEX

P.O. Box : 1736, Ruwi, Postal Code: 112, sultanate of Oman
Tel: +968 - 24707312, Fax: +968 - 24705533, +968-94193006
Website : www.al-saleh.com | omex-global.com